

市场总部

广东省东莞市东城区同沙太初坊村东街1号
Tel: +86-769-88990166 89972888(30线)
Fax: +86-769-89972868
E-mail: chn@gboslaser.com

外贸部

Tel: +86-769-88990609(3线)
Fax: +86-769-88990677
E-mail: gbos@gboslaser.com
邮编: 523123

江苏分公司

E-mail: liuwu@gboslaser.com
手机: +86-18922521988
电话: +86-579-85668328

晋江办事处

电话: +86-13825708116
E-mail: xs13@gboslaser.com

昆山办事处

电话: +86-189-66008968
E-mail: xs12@gboslaser.com

越南分公司

地址: 越南平阳省顺安市顺安坊顺交黎民中路134号
电话: +84-0274-3721996
传真: +84-0274-3721995
Email: xs19@gboslaser.com

孟加拉办事处

地址: 孟加拉国达卡市乌特拉3区13路5A号
电话: +88-016-40910248
Email: bd@gboslaser.com

Headquarter

East Street No.1,TaiChuFang Village, Tongsha, Dongcheng District,Dongguan City, Guangdong Province, China
Tel: +86-769-88972868 89972888
Fax: +86-769-89972868
E-mail: chn@gboslaser.com

Export office

Tel: +86-769-88990609
Fax: +86-769-88990677
E-mail: gbos@gboslaser.com
P.C: 523123

Jiangsu

E-mail: liuwu@gboslaser.com
Tel: +86-18922521988

Jinjiang

Tel: +86-13825708116
E-mail: xs13@gboslaser.com

Kunshan

Tel: +86-18966008968
E-mail: xs12@gboslaser.com

Vietnam

No. 134, Le Thi Trung Street, Thuan Giao ward and town of Thuan An and Binh Duong, Vietnam
Tel: +84-0274-3721996
Fax: +84-0274-3721995
Email: xs19@gboslaser.com



Bangladesh

House No.5A (1st Floor), Road No.13, Sector-3, Uttara, Dhaka-1230, Bangladesh
Tel: +88-016-40910248
Email: bd@gboslaser.com

光 2020-02版

内衣行业解决方案

SOLUTIONS FOR UNDERWEAR INDUSTRY

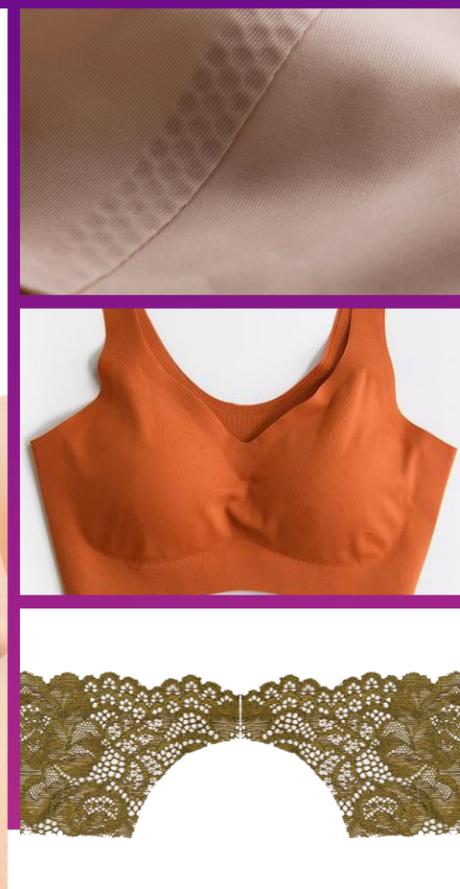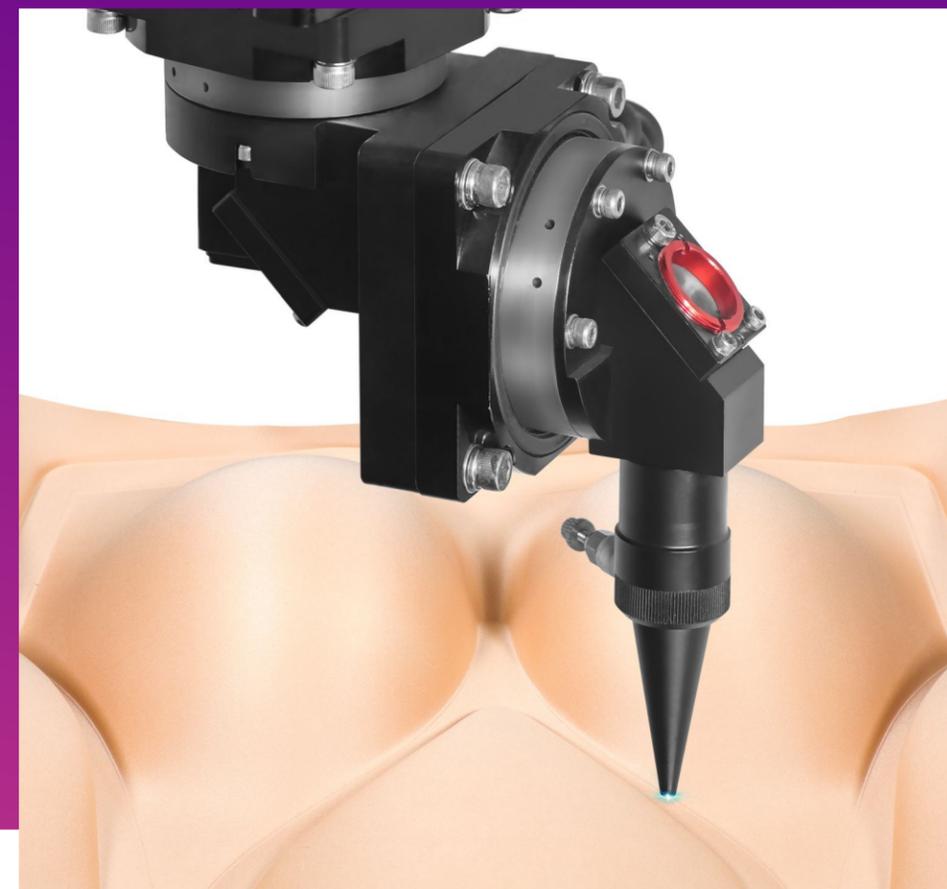

INNOVATIVE MANUFACTURING PROCESS OF UNDERWEAR

内衣创新制造工艺



东莞市光博士激光科技股份有限公司 GBOS LASER INC.

东莞研发中心 / 生产基地: 广东省东莞市东城区同沙太初坊村东街1号
Dongguan R&D center / Production base: East Street No.1,TaiChuFang Village,
Tongsha, Dongcheng District,Dongguan City, Guangdong Province, China

江西生产基地: 江西微驰自动化科技有限公司
Production Base: VCHI AUTOMATION INC.

中国区: 0769-89972888
chn@gboslaser.com

海外/EXPORT: +86-769-88990609
gbos@gboslaser.com

www.gboslaser.com
www.gboscutter.com

☎ 400-6677-328




激光·智能化 / 刀片·智能裁
SMART LASER & KNIFE CUT SYS

内衣行业解决方案


SOLUTIONS FOR UNDERWEAR INDUSTRY




蕾丝花边切割
Lace cutting

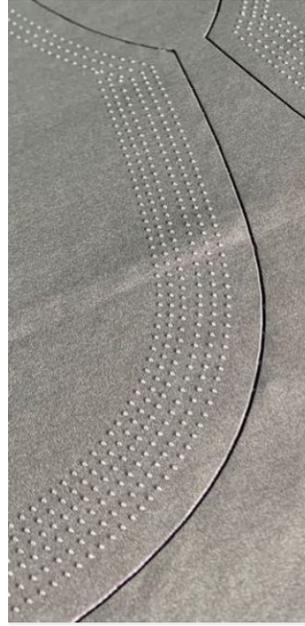

PUR 点胶+激光切割
PUR Dispensing+Laser cutting

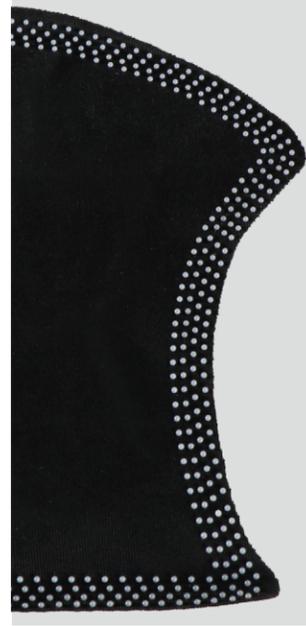

PUR 点胶+震动刀切割
PUR Dispensing+knife cutting

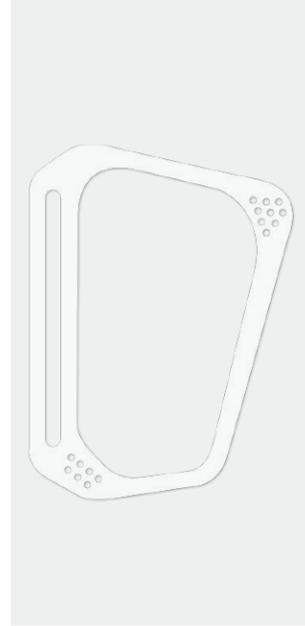


无缝胶条切割
Seamless tape cutting



高弹布料切割
High elastic fabric cutting



3D立体裁剪
Bra 3D cutting

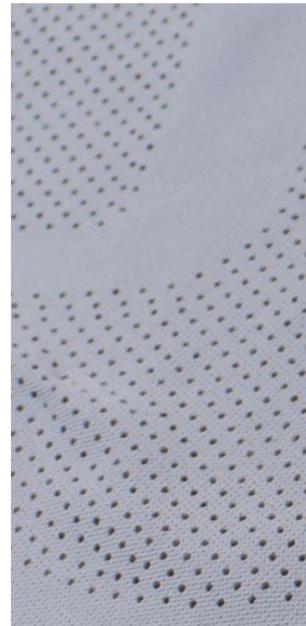

透气孔切割
Air hole perforation



无感印唛
Senseless carelabel marking

SCCD视觉识别蕾丝花边切割

SCCD SMART LACE LASER CUTTING MACHINE

≈99% 以上合格率
Pass rate

无漏切, 切割精度可达±0.2mm
No missing, cutting precision ±0.2mm



MS124L

全自动无人看管作业, 一人可操作5台机器以上
Unattended Operation, One engineer can operate 5 machines at least



大面积自动识别视觉切割
(识别+切割+送料)
Large area automatic recognition and cutting (Recognition + Cutting + feeding)




多模板
Multi-design cutting



自动送料、送料、识别多图档定位切割
Material auto feeding + Multi-design positioning cutting

拓展功能 EXPAND FUNCTIONS



3D切割及镂空
3D cutting and hollowing



微信扫一扫
在线观看机器工作视频
Scan the QR code
Check Video demo

技术参数 TECHNICAL PARAMETERS


机器型号 Model	功能 Function	加工面积 (毫米) Processing Area (mm)	整机功率 Gross Power	机器尺寸(毫米) (长×宽×高) Measurement(mm) (L×W×H)	系统/兼容格式 System/ Compatible Format	重量(千克) Weight(kg)	电源 Power Supply	环境要求 Environmental Requirements
MS124L	蕾丝花边切割 Lace Laser Cutting	1200×400	≈3600W	2455×1200×2100	Windows 7/8/10 AI, PLT, DXF, DST, BMP, JPG, JPEG, PNA, TIF等.	700KG	220V/10A, 50Hz or 60Hz	温度 10-30°C 湿度(无结露) 30-80% Temperature 10-30°C Humidity (no condensation) 30-80%

注: 整机功率(含水箱+风机+吹气机), 带*号则为不含。 Gross power(including chiller+air compressor+exhauster), while which marked with a * do not include.


无缝点胶应用

SEAMLESS DISPENSING APPLICATION

点胶与切割一气呵成
Dispensing and cutting in one step



裁片定位识别点胶
Pieces positioning recognition dispensing

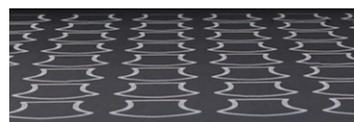

PUR 点胶+整卷布料切割
PUR Dispensing+cutting full roll fabric



无缝口袋胶带切割
Seamless pocket tape cutting



VC9-1612-SCCD-DP

多功能数字点胶机(点胶+刀片切割)
dispensing & multifunctional digital knife cutting system



不黄、不黑、不焦边
Cutting with no burn and no yellow edge



GN1280-DP-SG

多功能数字点胶机(点胶+激光切割)
dispensing & laser cutting system

微信扫一扫
在线观看机器工作视频
Scan the QR code
Check Video demo



技术参数 TECHNICAL PARAMETERS

机器型号 Model	功能 Function	加工面积 (毫米) Processing Area (mm)	整机功率 Gross Power	机器尺寸(毫米) (长×宽×高) Measurement(mm) (L×W×H)	系统/兼容格式 System/ Compatible Format	重量(千克) Weight(kg)	电源 Power Supply	环境要求 Environmental Requirements
VC9-1612-SCCD-DP	点胶+视觉识别定位 +刀片切割(圆刀) Dispensing & visual recognition & knife cutting (wheel knife)	1600×1200	≈2300W	2810×2230×2320	Windows 7/8/10 AI, PLT, DXF, DST, BMP, JPG, JPEG, PNA, TIF等.	580KG	380VAC/19A, 50Hz	温度 10-30°C 湿度(无结露) 30-80% Temperature 10-30°C Humidity (no condensation) 30-80%
GN1280-DP-SG	点胶+激光切割 Dispensing & laser cutting	1085×630	≈3200W	2470×1300×1620		240KG	220V/10Amax 50Hz or 60Hz	

注:整机功率(含水箱+风机+吹气机),带*号则为不含。 Gross power(including chiller+air compressor+exhauster), while which marked with a * do not include.

精品线专用震动刀切割机




SUPERIOR LINE PROFESSIONAL OSCILLATING KNIFE CUTTING MACHINE

多层柔性布料切割(约20层)
Multi layers flexible fabric cutting(about 20 layers)



VC9-1616TT

夹取自动送料,无限长连续切割
Clamp automatic feeding, infinite length continuous cutting



切割精细,缝绉对位点切割不拉丝,切面平整无毛边
High precision cutting, can cut small sewing fixed point for garment without burrs, smooth cut surface without burrs



微信扫一扫
在线观看机器工作视频
Scan the QR code
Check Video demo

技术参数 TECHNICAL PARAMETERS

机器型号 Model	功能 Function	加工面积 (毫米) Processing Area (mm)	整机功率 Gross Power	机器尺寸(毫米) (长×宽×高) Measurement(mm) (L×W×H)	系统/兼容格式 System/ Compatible Format	重量(千克) Weight(kg)	电源 Power Supply	环境要求 Environmental Requirements
VC9-1616TT	柔性布料切割 flexible cloth cutting	1600×1600	≈6000W	7160×2620×1290	Windows 7/8/10 AI, PLT, DXF, DST, BMP, JPG, JPEG, PNA, TIF等.	2600KG	380VAC/35A 50Hz	温度 10-30°C 湿度(无结露) 30-80% Temperature 10-30°C Humidity (no condensation) 30-80%

注:整机功率(含水箱+风机+吹气机),带*号则为不含。 Gross power(including chiller+air compressor+exhauster), while which marked with a * do not include.

3D切割、镂空、雕花工艺


3D CUTTING, HOLLOWING AND MARKING PROCESS

个性化订制, 支持任意创意设计

Personalized customization, support any creative design



3D切割, 红光定位、无耗材、无毛边
3D cutting, Red light preview, no consumable parts, no burrs

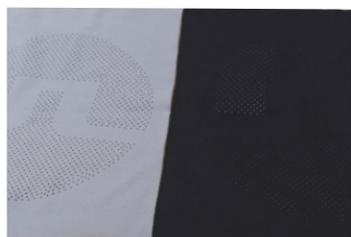

透气孔镂空, 不黄、不焦、无异味
Air hole perforation, no yellow, no burnt, no smelling



XXP3.2-180

无感印唛应用

SENSELESS CARELABEL MARKING APPLICATION

实现超精细标刻, 永久标记(任意图档, 即时输出)

Realize super fine marking and permanent marking (Any design, immediate finish)



UV3A



- 环保(免油墨)
- 免模(无需模具)
- 永久性(杜绝篡改)
- 无感(舒适)
- Energy saving and Eco-friendly(no need ink)
- Do not need mould.
- Permanent marking(Avoid falsify)
- Senseless(confortable)



技术参数 TECHNICAL PARAMETERS

机器型号 Model	功能 Function	加工面积 (毫米) Processing Area (mm)	整机功率 Gross Power	机器尺寸(毫米) (长×宽×高) Measurement(mm) (L×W×H)	系统/兼容格式 System/ Compatible Format	重量(千克) Weight(kg)	电源 Power Supply	环境要求 Environmental Requirements
XXP3.2-180	切割&镂空、雕花 cutting & marking	600×600	≈5000W	1000×750×1580	Windows 7/8/10 AI, PLT, DXF, DST, BMP, JPG, JPEG, PNA, TIF等.	220KG	220V/20A, 50Hz or 60Hz	温度 10-30°C 湿度(无结露) 30-80% Temperature 10-30°C Humidity (no condensation) 30-80%

注: 整机功率(含水箱+风机+吹气机), 带*号则为不含. Gross power(including chiller+air compressor+exhauster), while which marked with a * do not include.

技术参数 TECHNICAL PARAMETERS

机器型号 Model	功能 Function	加工面积 (毫米) Processing Area (mm)	整机功率 Gross Power	机器尺寸(毫米) (长×宽×高) Measurement(mm) (L×W×H)	系统/兼容格式 System/ Compatible Format	重量(千克) Weight(kg)	电源 Power Supply	环境要求 Environmental Requirements
UV3A	水洗唛印标 washing labels marking	100×100 175×175	≈1200W	1150×800×1250	Windows 7/8/10 AI, PLT, DXF, DST, BMP, JPG, JPEG, PNA, TIF等.	70KG	220V/10A max 50Hz or 60Hz	温度 10-30°C 湿度(无结露) 30-80% Temperature 10-30°C Humidity (no condensation) 30-80%

注: 整机功率(含水箱+风机+吹气机), 带*号则为不含. Gross power(including chiller+air compressor+exhauster), while which marked with a * do not include.